

<p>Executing tasks in Threads</p> <ul style="list-style-type: none"> Executing sequentially Disadvantages of unbound thread creation <p>Executor framework</p> <ul style="list-style-type: none"> Execution policies Thread pools The Executors Factory The factory methods <p>Exploitable parallelism</p> <ul style="list-style-type: none"> The Callable Interface Completion service Delay and periodic tasks <p>Task Execution Summary</p> <ul style="list-style-type: none"> Completion Service Examples 	<p>Untitled Sheets</p> <p>HOM</p> <p>Executing tasks in Threads</p> <ul style="list-style-type: none"> Executing sequentially Disadvantages of unbound thread creation <p>Executor framework</p> <ul style="list-style-type: none"> Execution policies Thread pools The Executors Factory The factory methods <p>Exploitable parallelism</p> <ul style="list-style-type: none"> The Callable Interface Completion service Delay and periodic tasks <p>Task Execution Summary</p> <ul style="list-style-type: none"> Completion Service Examples
<p><small>HOM/FHTest Untitled Sheets March 8, 2016</small></p>	<p><small>1/44</small></p>

<h1 style="text-align: center;">Part II</h1> <h2 style="text-align: center;">Structuring Concurrent Applications</h2>	<p>Untitled Sheets</p> <p>HOM</p> <p>Executing tasks in Threads</p> <ul style="list-style-type: none"> Executing sequentially Disadvantages of unbound thread creation <p>Executor framework</p> <ul style="list-style-type: none"> Execution policies Thread pools The Executors Factory The factory methods <p>Exploitable parallelism</p> <ul style="list-style-type: none"> The Callable Interface Completion service Delay and periodic tasks <p>Task Execution Summary</p> <ul style="list-style-type: none"> Completion Service Examples
<p><small>HOM/FHTest Untitled Sheets March 8, 2016</small></p>	<p><small>2/44</small></p>

<p>Tasks are natural</p> <p>Tasks a building blocks</p> <p>Most concurrent applications are organized around the execution of <i>tasks</i>: abstract, discrete units of work. Dividing the work of an application into tasks simplifies program organization, facilitates error recovery by providing natural transaction boundaries and promotes concurrency by providing a natural structure for paralllelizing work.</p>	<p>Untitled Sheets</p> <p>HOM</p> <p>Executing tasks in Threads</p> <ul style="list-style-type: none"> Executing sequentially Disadvantages of unbound thread creation <p>Executor framework</p> <ul style="list-style-type: none"> Execution policies Thread pools The Executors Factory The factory methods <p>Exploitable parallelism</p> <ul style="list-style-type: none"> The Callable Interface Completion service Delay and periodic tasks <p>Task Execution Summary</p> <ul style="list-style-type: none"> Completion Service Examples
<p><small>HOM/FHTest Untitled Sheets March 8, 2016</small></p>	<p><small>3/44</small></p>

<p>Designing your program organization</p> <ul style="list-style-type: none"> ● Identify sensible task boundaries ● Ideally, tasks are <i>independent</i> activities: work that does not depend on other tasks. ● Independence facilitates concurrency ● To be able to do load balancing, the tasks should make out only small fractions of the application's processing capacity. 	<p>Untitled Sheets</p> <p>HOM</p> <p>Executing tasks in Threads</p> <ul style="list-style-type: none"> Executing sequentially Disadvantages of unbound thread creation <p>Executor framework</p> <ul style="list-style-type: none"> Execution policies Thread pools The Executors Factory The factory methods <p>Exploitable parallelism</p> <ul style="list-style-type: none"> The Callable Interface Completion service Delay and periodic tasks <p>Task Execution Summary</p> <ul style="list-style-type: none"> Completion Service Examples
<p><small>HOM/FHTest Untitled Sheets March 8, 2016</small></p>	<p><small>4/44</small></p>

Server applications and degradation

- Server applications should show *good throughput* and *good responsiveness* under normal load.
- The application should exhibit *graceful degradation* under heavy (over) load.
- Choosing good task boundaries and a sensible task execution policy will help achieve these goals
- Most server applications have a natural choice of task boundaries

Untitled Sheets

HOM

Executing tasks in Threads

Executing sequentially
Disadvantages of unbound thread creation

Executor framework

Execution policies
Thread pools
The Executors Factory
The factory methods

Exploitable parallelism

The Callable Interface
Completion service
Delay and periodic tasks

Task Execution Summary

Completion Service
Examples

HOM/FHTeal

Untitled Sheets

March 8, 2016

5/44

Singlethreadedness, too little...

- Network and disk operations block. This makes the cpu free for other tasks. But here there is no opportunity to exploit that.

```
public class SingleThreadWebServer {
    public static void main(String[] args) throws IOException {
        ServerSocket socket = new ServerSocket(80);
        while (true) {
            Socket connection = socket.accept();
            handleRequest(connection);
        }

        private static void handleRequest(Socket connection) {
            // request-handling logic here
        }
    }
}
```

Untitled Sheets

HOM

Executing tasks in Threads

Executing sequentially
Disadvantages of unbound thread creation

Executor framework

Execution policies
Thread pools
The Executors Factory
The factory methods

Exploitable parallelism

The Callable Interface
Completion service
Delay and periodic tasks

Task Execution Summary

Completion Service
Examples



HOM/FHTeal

Untitled Sheets

March 8, 2016

6/44

Unbound MultiThreadedness

On the other hand, a thread per task might not be a good idea.

```
public class ThreadPerTaskWebServer {
    public static void main(String[] args) throws IOException {
        ServerSocket socket = new ServerSocket(80);
        while (true) {
            final Socket connection = socket.accept();
            Runnable task = new Runnable() {
                public void run() {
                    handleRequest(connection);
                }
            };
            new Thread(task).start();
        }

        private static void handleRequest(Socket connection) {
            // request-handling logic here
        }
    }
}
```

Untitled Sheets

HOM

Executing tasks in Threads

Executing sequentially
Disadvantages of unbound thread creation

Executor framework

Execution policies
Thread pools
The Executors Factory
The factory methods

Exploitable parallelism

The Callable Interface
Completion service
Delay and periodic tasks

Task Execution Summary

Completion Service
Examples



HOM/FHTeal

Untitled Sheets

March 8, 2016

7/44

Consequences of multi threading

In the second solution a thread is started per request. This has Three consequences:

- Task processing is offloaded from the main (network daemon) thread, enabling the main loop to accept incoming connections more quickly
- Task can be processed in parallel, so more requests can be serviced simultaneously.
- Task handling code must be thread-safe, because it may be invoked concurrently.
- In the example the number of Threads generated is unbound, risking resource depletion, which wins it a 😬

Untitled Sheets

HOM

Executing tasks in Threads

Executing sequentially
Disadvantages of unbound thread creation

Executor framework

Execution policies
Thread pools
The Executors Factory
The factory methods

Exploitable parallelism

The Callable Interface
Completion service
Delay and periodic tasks

Task Execution Summary

Completion Service
Examples

HOM/FHTeal

Untitled Sheets

March 8, 2016

8/44

Disadvantages of unbound thread creation

For production purposes (large webservers for instance) the task per thread approach has some drawbacks.

Thread life cycle overhead Thread creation and tear down is not for free. It involves the JVM and underlying OS. For lots of lightweight threads this is not very efficient.

Resource consumption Active Threads consume extra memory, for instance to provide for a thread stack.

Thread/CPU ratio If there are less CPU's than threads, some threads sit idle. If you have many of these, these idle threads use up lots of memory.

Stability There is a limit on how many threads you can have concurrently. If you hit this limit your program will most likely become unstable.

Untitled Sheets

HOM

- Executing tasks in Threads
- Executing sequentially
- Disadvantages of unbound thread creation
- Executor framework
- Execution policies
- Thread pools
- The Executors Factory
- The factory methods
- Exploitable parallelism
- The Callable Interface
- Completion service
- Delay and periodic tasks
- Task Execution Summary
- Completion Service
- Examples

HOM/FHTest

Untitled Sheets

March 8, 2016

9/44

Unbounded thread creation example

```

package boom ;
public class ThreadBomb implements Runnable {
    private static int b=0;
    /**
     * @param args
     */
    public static void main ( String [] args ) {
        try {
            while ( true ){
                new Thread (new ThreadBomb ()). start ();
                b++;
            } finally {
                System .err . println (b);
                System . exit (0);
            }
        }
        ThreadBomb (){}
        public void run (){}
        while ( true ) {
            Thread . yield ();
        }
    }
}

```

Untitled Sheets

HOM

- Executing tasks in Threads
- Executing sequentially
- Disadvantages of unbound thread creation
- Executor framework
- Execution policies
- Thread pools
- The Executors Factory
- The factory methods
- Exploitable parallelism
- The Callable Interface
- Completion service
- Delay and periodic tasks
- Task Execution Summary
- Completion Service
- Examples

HOM/FHTest

Untitled Sheets

March 8, 2016

10/44

Executor framework

Executor Interface

```

public interface Executor {
    void execute(Runnable command);
}

```

- Task are logical units of work. And threads provide a mechanism to run them asynchronously.
- Thread pools are the means to keep the amount of threads manageable.
- The abstraction for task execution in Java is *not* Thread but Executor.
- Although the interface is simple, it is the basis of a flexible framework for asynchronous execution.
- Executor decouples task-*submission* from task-*execution*.

Untitled Sheets

HOM

- Executing tasks in Threads
- Executing sequentially
- Disadvantages of unbound thread creation
- Executor framework
- Execution policies
- Thread pools
- The Executors Factory
- The factory methods
- Exploitable parallelism
- The Callable Interface
- Completion service
- Delay and periodic tasks
- Task Execution Summary
- Completion Service
- Examples

HOM/FHTest

Untitled Sheets

March 8, 2016

11/44

Executor web server

```

public class TaskExecutionWebServer {
    private static final int NTHREADS = 100;
    private static final Executor exec
        = Executors.newFixedThreadPool(NTHREADS);

    public static void main(String[] args) throws IOException {
        ServerSocket socket = new ServerSocket(80);
        while (true) {
            final Socket connection = socket.accept();
            Runnable task = new Runnable() {
                public void run() {
                    handleRequest(connection);
                }
            };
            exec.execute(task);
        }
    }
}

```

Untitled Sheets

HOM

- Executing tasks in Threads
- Executing sequentially
- Disadvantages of unbound thread creation
- Executor framework
- Execution policies
- Thread pools
- The Executors Factory
- The factory methods
- Exploitable parallelism
- The Callable Interface
- Completion service
- Delay and periodic tasks
- Task Execution Summary
- Completion Service
- Examples


HOM/FHTest

Untitled Sheets

March 8, 2016

12/44

TaskExecutionWebServer sequencediagram

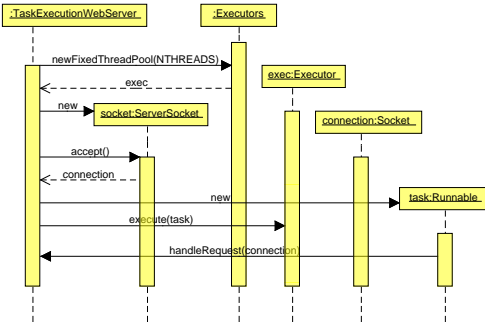

Untitled Sheets

HOM

Executing tasks in Threads

Executing sequentially

Disadvantages of unbound thread creation

Executor framework

Execution policies

Thread pools

The Executors Factory

The factory methods

Exploitable parallelism

The Callable Interface

Completion service

Delay and periodic tasks

Task Execution Summary

Completion Service Examples

13/44

Flexibility gained: Execution policies

The flexibility you gain with Executor, is that you can still simulate the previous sub-optimal models, but since you separated the submission from actual execution, various execution policies can be used and tuned.

- In what thread will the task be executed?
- In what order should the tasks be executed (Queue, Stack, priority)?
- What about the amount of parallelism?
- How many task may be queued?
- If there is a *cancellation* victim, how should you select this victim?
- What (if any) actions are there to take before or after task execution?

Whenever you see `new Thread(runnable).start();` you might want to consider replacing this use with an Executor.

Untitled Sheets

HOM

Executing tasks in Threads

Executing sequentially

Disadvantages of unbound thread creation

Executor framework

Execution policies

Thread pools

The Executors Factory

The factory methods

Exploitable parallelism

The Callable Interface

Completion service

Delay and periodic tasks

Task Execution Summary

Completion Service Examples

14/44



The simple life of a Thread in a pool

Swim, swim, swim.

Untitled Sheets

HOM

Executing tasks in Threads

Executing sequentially

Disadvantages of unbound thread creation

Executor framework

Execution policies

Thread pool

The Executors Factory

The factory methods

Exploitable parallelism

The Callable Interface

Completion service

Delay and periodic tasks

Task Execution Summary

Completion Service Examples

15/44

Thread pools are fabricated

The class library provides a number of factory methods for various ThreadPools.

- `newFixedThreadPool` Fixed size pool, that is the maximum number of threads in the pool is fixed.
- `newCachedThreadPool` Boundless, but the pool shrinks and grows when demand dictates so.
- `newSingleThreadedExecutor` Helps to enforce a task order, dependent on the task queue used.
- `newScheduledThreadPool` Supports delayed and periodic execution like a timer but with more flexibility.

These executors and its factory methods in Executors give opportunities for tuning, management, monitoring, logging, error reporting etc, which are much more difficult to achieve without the framework.

Untitled Sheets

HOM

Executing tasks in Threads

Executing sequentially

Disadvantages of unbound thread creation

Executor framework

Execution policies

Thread pool

The Executors Factory

The factory methods

Exploitable parallelism

The Callable Interface

Completion service

Delay and periodic tasks

Task Execution Summary

Completion Service Examples

16/44

The Executors class

`public class Executors extends Object`
It provides Factory and utility methods for:

- **Executor**,
- **ExecutorService**,
- **ScheduledExecutorService**,
- **ThreadFactory**, and
- **Callable**

Untitled Sheets

HOM

Executing tasks in Threads
Executing sequentially
Disadvantages of unbound thread creation

Executor framework
Execution policies
Thread pools

The Executors Factory
The factory methods

Exploitable parallelism
The Callable interface
Completion service
Delay and periodic tasks

Task Execution Summary
Completion Service Examples

HOM/FHTest

Untitled Sheets

March 8, 2016

17/44

Factory methods in Executors.

Executors supports the following methods: Methods that create and return

- an **ExecutorService** set up with commonly useful configuration settings.
- a **ScheduledExecutorService** set up with commonly useful configuration settings.
- a **"wrapped" ExecutorService**, that disables reconfiguration by making implementation-specific methods inaccessible.
- a **ThreadFactory** that sets newly created threads to a known state.
- a **Callable** out of other closure-like forms, so they can be used in execution methods requiring Callable.

Untitled Sheets

HOM

Executing tasks in Threads
Executing sequentially
Disadvantages of unbound thread creation

Executor framework
Execution policies
Thread pools

The Executors Factory
The factory methods

Exploitable parallelism
The Callable interface
Completion service
Delay and periodic tasks

Task Execution Summary
Completion Service Examples

HOM/FHTest

Untitled Sheets

March 8, 2016

18/44

The factory methods I

`public static ExecutorService
newFixedThreadPool(int nThreads)`

- Creates a thread pool that reuses a fixed set of threads operating off a shared unbounded queue.
- If any thread terminates due to a failure during execution prior to shutdown, a new one will take its place if needed to execute subsequent tasks.
- Parameters: nThreads - the number of threads in the pool

Untitled Sheets

HOM

Executing tasks in Threads
Executing sequentially
Disadvantages of unbound thread creation

Executor framework
Execution policies
Thread pools

The Executors Factory
The factory methods

Exploitable parallelism
The Callable interface
Completion service
Delay and periodic tasks

Task Execution Summary
Completion Service Examples

HOM/FHTest

Untitled Sheets

March 8, 2016

19/44

The factory methods II

`public static ExecutorService
newCachedThreadPool()`

- Creates a thread pool that creates new threads as needed, but will reuse previously constructed threads when they are available.
- These pools will typically improve the performance of programs that execute many short-lived asynchronous tasks.
- Calls to execute will reuse previously constructed threads if available. If no existing thread is available, a new thread will be created and added to the pool. Threads not being used for sixty seconds are terminated and removed from the cache. Thus, a pool that remains idle for long enough will not consume any resources.
- Note that pools with similar properties but different details (for example, timeout parameters) may be created using `ThreadPoolExecutor` constructors.

Untitled Sheets

HOM

Executing tasks in Threads
Executing sequentially
Disadvantages of unbound thread creation

Executor framework
Execution policies
Thread pools

The Executors Factory
The factory methods

Exploitable parallelism
The Callable interface
Completion service
Delay and periodic tasks

Task Execution Summary
Completion Service Examples

HOM/FHTest

Untitled Sheets

March 8, 2016

20/44

The factory methods III

```
public static ScheduledExecutorService
newSingleThreadScheduledExecutor()
```

- Creates a single-threaded executor that can schedule commands to run after a given delay, or to execute periodically.
- Note however that if this single thread terminates prior to shutdown, a new one will take its place if needed to execute subsequent tasks.
- Tasks are guaranteed to execute sequentially, and no more than one task will be active at any given time. Unlike the otherwise equivalent `newScheduledThreadPool(1)` the returned executor is **guaranteed** not to be reconfigurable to use additional threads.

Untitled Sheets

HOM

- Executing tasks in Threads
 - Executing sequentially
 - Disadvantages of unbound thread creation
- Executor framework
 - Execution policies
 - Thread pools
 - The Executors Factory
- The factory methods
- Exploitable parallelism
 - The Callable interface
 - Completion service
 - Delay and periodic tasks
- Task Execution Summary
 - Completion Service
 - Examples

HOM/FHTest

Untitled Sheets

March 8, 2016

21/44

The factory methods IV

```
public static ScheduledExecutorService
newScheduledThreadPool(int corePoolSize)
```

- Creates a thread pool that can schedule commands to run after a given delay, or to execute periodically.
- Parameters: `corePoolSize` - the number of threads to keep in the pool, even if they are idle.

Untitled Sheets

HOM

- Executing tasks in Threads
 - Executing sequentially
 - Disadvantages of unbound thread creation
- Executor framework
 - Execution policies
 - Thread pools
 - The Executors Factory
- The factory methods
- Exploitable parallelism
 - The Callable interface
 - Completion service
 - Delay and periodic tasks
- Task Execution Summary
 - Completion Service
 - Examples

HOM/FHTest

Untitled Sheets

March 8, 2016

22/44

Exploiting Parallelism

With an `Executor` you write a `Runnable`, thereby defining a so called *task boundary*. For the web server example this coincides with the actual task boundary: that's okay. In other applications this might be less obvious.

Example in this section: the page-rendering part of a browser application. An HTML-page is rendered to an image buffer. The page consists of text and images.

First approach: sequentially processing. See the code on the next slide.

Untitled Sheets

HOM

- Executing tasks in Threads
 - Executing sequentially
 - Disadvantages of unbound thread creation
- Executor framework
 - Execution policies
 - Thread pools
 - The Executors Factory
- The factory methods
- Exploitable parallelism
 - The Callable interface
 - Completion service
 - Delay and periodic tasks
- Task Execution Summary
 - Completion Service
 - Examples

HOM/FHTest

Untitled Sheets

March 8, 2016

23/44

Listing 6.10: Rendering page elements sequentially

```
public abstract class SingleThreadRenderer {
    void renderPage(CharSequence source) {
        renderText(source);
        List<ImageData> imageData = new ArrayList<ImageData>();
        for (ImageInfo imageInfo : scanForImageInfo(source))
            imageData.add(imageInfo.downloadImage());
        for (ImageData data : imageData)
            renderImage(data);
    }
}

interface ImageData {
}

interface ImageInfo {
    ImageData downloadImage();
}

abstract void renderText(CharSequence s);
abstract List<ImageInfo> scanForImageInfo(CharSequence s);
abstract void renderImage(ImageData i);
}
```

Untitled Sheets

HOM

- Executing tasks in Threads
 - Executing sequentially
 - Disadvantages of unbound thread creation
- Executor framework
 - Execution policies
 - Thread pools
 - The Executors Factory
- The factory methods
- Exploitable parallelism
 - The Callable interface
 - Completion service
 - Delay and periodic tasks
- Task Execution Summary
 - Completion Service
 - Examples

HOM/FHTest

Untitled Sheets

March 8, 2016

24/44

Sequential processing

- Simple implementation
- Disadvantage: page is rendered gradually as in *slow*.
- Better but still annoying: first text elements and then the pictures. User can start reading!
- Latter approach is in listing 6.10.

Fetching the images takes time, just like expensive calculations or database retrieval. Instead of a Runnable task a better abstraction is the Callable interface.

```
public interface Callable<V> {
    V call() throws Exception;
}
```

Executing tasks in Threads

Executing sequentially
Disadvantages of unbound thread creation

Executor framework

Execution policies
Thread pools
The Executors Factory
The factory methods

Exploitable parallelism

The Callable Interface
Completion service
Delay and periodic tasks

Task Execution Summary

Completion Service
Examples

From the java api: Callable

```
public interface Callable<V>
```

A task that returns a result and may throw an exception. Implementers define a single method with no arguments called call with return type V.

The Callable interface is similar to Runnable, in that both are designed for classes whose instances are potentially executed by another thread. A Runnable, however, does not return a result and cannot throw a checked exception.

The Executors class contains utility methods to convert from other common forms to Callable classes.

Executing tasks in Threads

Executing sequentially
Disadvantages of unbound thread creation

Executor framework

Execution policies
Thread pools
The Executors Factory
The factory methods


Exploitable parallelism

The Callable Interface
Completion service
Delay and periodic tasks

Task Execution Summary

Completion Service
Examples

States of a task



A task can be in one of the four states: *created*, *submitted*, *started* and *completed*.

A user might want to cancel a task! This is now possible with the Executor framework. When submitted but not yet started a task can be canceled. The Future interface represents the life cycle of a task.

Executing tasks in Threads

Executing sequentially
Disadvantages of unbound thread creation

Executor framework

Execution policies
Thread pools
The Executors Factory
The factory methods

Exploitable parallelism

The Callable Interface
Completion service
Delay and periodic tasks

Task Execution Summary

Completion Service
Examples

From the java api: Future

```
public interface Future<V>{
    boolean cancel(boolean mayInterruptIfRunning);
    boolean isCancelled();
    boolean isDone();
    V get() throws InterruptedException,
        ExecutionException;
    V get(long timeout, TimeUnit unit)
        throws InterruptedException,
        ExecutionException,
        TimeoutException;
}
```

Executing tasks in Threads

Executing sequentially
Disadvantages of unbound thread creation

Executor framework

Execution policies
Thread pools
The Executors Factory
The factory methods

Exploitable parallelism

The Callable Interface
Completion service
Delay and periodic tasks

Task Execution Summary

Completion Service
Examples

From the java api: ExecutorService

`public interface ExecutorService extends Executor`
 Some methods:

- `<T> Future<T> submit(Callable<T> task)`
- `boolean isTerminated()`
- `void shutdown()`

An Executor that provides methods to manage termination and methods that can produce a Future for tracking progress of one or more asynchronous tasks.

An ExecutorService can be shut down, which will cause it to stop accepting new tasks. After being shut down, the executor will eventually terminate, at which point no tasks are actively executing, no tasks are awaiting execution, and no new tasks can be submitted.

Untitled Sheets
 HOM
 Executing tasks in Threads
 Executor framework
 Exploitable parallelism
 The Callable Interface
 Task Execution Summary

From the java api: ExecutorService (2)

Method submit extends base method `Executor.execute(java.lang.Runnable)` by creating and returning a Future that can be used to cancel execution and/or wait for completion. Methods `invokeAny()` and `invokeAll()` perform the most commonly useful forms of bulk execution, executing a collection of tasks and then waiting for at least one, or all, to complete. (Class `ExecutorCompletionService` can be used to write customized variants of these methods.)

The Executors class provides factory methods for the executor services provided in this package.

Untitled Sheets
 HOM
 Executing tasks in Threads
 Executor framework
 Exploitable parallelism
 The Callable Interface
 Task Execution Summary

Divide the work in runnable tasks

- To be able to use executors successfully, your application should have some natural exploitable parallelism.
- Sometimes these tasks come natural, like in a web server request-response cycle.
- Sometimes you need result bearers; that is where Callable and Future come in.
- Callable has a better mechanism to deal with exceptions.
- Runnable and Callable describe abstract computational tasks which are usually finite.
- Cancellation is also provided, avoiding the problems with `Thread.stop()` etc.

Untitled Sheets
 HOM
 Executing tasks in Threads
 Executor framework
 Exploitable parallelism
 The Callable Interface
 Task Execution Summary

Parallelism payoff

Best performance payoff with homogeneous tasks
 The real performance payoff of dividing a program's workload into tasks comes when there are a large number of independent, homogeneous tasks that can be processed concurrently.

Untitled Sheets
 HOM
 Executing tasks in Threads
 Executor framework
 Exploitable parallelism
 The Callable Interface
 Task Execution Summary

Executor meets BlockingQueue

Why poll and wait when someone else can wait for you?
CompletionService is the marriage of an Executor with a BlockingQueue:

```
public interface CompletionService<V> {
    Future<V> submit(Callable<V> task);
    Future<V> submit(Runnable task, V result);
    Future<V> take() throws InterruptedException;
    Future<V> poll();
    Future<V> poll(long timeout, TimeUnit unit)
        throws InterruptedException;
}
```

HOM/FHTest Untitled Sheets March 8, 2016 33/44

Untitled Sheets

HOM

- Executing tasks in Threads
- Executing sequentially
- Disadvantages of unbounded thread creation
- Executor framework
- Execution policies
- Thread pools
- The Executors Factory
- The Factory methods
- Exploitable parallelism
- The Callable Interface
- Completion service
- Delay and periodic tasks
- Task Execution Summary
- Completion Service
- Examples

ExecutorCompletionService I. FutureTask queues itself.

Extracted from the implementation src.zip, all comments removed

```
package java.util.concurrent;
public class ExecutorCompletionService<V>
    implements CompletionService<V> {
    private final Executor executor;
    private final AbstractExecutorService aes;
    private final BlockingQueue<Future<V>> completionQueue;

    /**
     * FutureTask extension to enqueue upon completion
     */
    private class QueueingFuture extends FutureTask<Void> {
        QueueingFuture(RunnableFuture<V> task) {
            super(task, null);
            this.task = task;
        }
        protected void done() { completionQueue.add(task); }
        private final Future<V> task;
    }
}
```

HOM/FHTest Untitled Sheets March 8, 2016 34/44

Untitled Sheets

HOM

- Executing tasks in Threads
- Executing sequentially
- Disadvantages of unbounded thread creation
- Executor framework
- Execution policies
- Thread pools
- The Executors Factory
- The Factory methods
- Exploitable parallelism
- The Callable Interface
- Completion service
- Delay and periodic tasks
- Task Execution Summary
- Completion Service
- Examples

ExecutorCompletionService II

```
private RunnableFuture<V> newTaskFor(Callable<V> task) {
    if (aes == null)
        return new FutureTask<V>(task);
    else
        return aes.newTaskFor(task);
}

private RunnableFuture<V> newTaskFor(Runnable task, V result) {
    if (aes == null)
        return new FutureTask<V>(task, result);
    else
        return aes.newTaskFor(task, result);
}
```

HOM/FHTest Untitled Sheets March 8, 2016 35/44

Untitled Sheets

HOM

- Executing tasks in Threads
- Executing sequentially
- Disadvantages of unbounded thread creation
- Executor framework
- Execution policies
- Thread pools
- The Executors Factory
- The Factory methods
- Exploitable parallelism
- The Callable Interface
- Completion service
- Delay and periodic tasks
- Task Execution Summary
- Completion Service
- Examples

ExecutorCompletionService, constructors

```
public ExecutorCompletionService(Executor executor) {
    if (executor == null)
        throw new NullPointerException();
    this.executor = executor;
    this.aes = (executor instanceof AbstractExecutorService) ?
        (AbstractExecutorService) executor : null;
    this.completionQueue = new LinkedBlockingQueue<Future<V>>();
}

public ExecutorCompletionService(Executor executor,
    BlockingQueue<Future<V>> completionQueue) {
    if (executor == null || completionQueue == null)
        throw new NullPointerException();
    this.executor = executor;
    this.aes = (executor instanceof AbstractExecutorService) ?
        (AbstractExecutorService) executor : null;
    this.completionQueue = completionQueue;
}
```

HOM/FHTest Untitled Sheets March 8, 2016 36/44

Untitled Sheets

HOM

- Executing tasks in Threads
- Executing sequentially
- Disadvantages of unbounded thread creation
- Executor framework
- Execution policies
- Thread pools
- The Executors Factory
- The Factory methods
- Exploitable parallelism
- The Callable Interface
- Completion service
- Delay and periodic tasks
- Task Execution Summary
- Completion Service
- Examples

ExecutorCompletionService submitters

```

public Future<V> submit(Callable<V> task) {
    if (task == null) throw new NullPointerException();
    RunnableFuture<V> f = newTaskFor(task);
    executor.execute(new QueuingFuture(f));
    return f;
}

public Future<V> submit(Runnable task, V result) {
    if (task == null) throw new NullPointerException();
    RunnableFuture<V> f = newTaskFor(task, result);
    executor.execute(new QueuingFuture(f));
    return f;
}

```

Untitled Sheets

HOM

- Executing tasks in Threads
- Executing sequentially
- Disadvantages of unbound thread creation
- Executor framework
- Execution policies
- Thread pools
- The Executors Factory
- The factory methods
- Exploitable parallelism
- The Callable Interface
- Completion service
- Delay and periodic tasks
- Task Execution Summary
- Completion Service Examples

HOM/FHTeal

Untitled Sheets

March 8, 2016

37/44

ExecutorCompletionService result getters

```

public Future<V> take() throws InterruptedException {
    return completionQueue.take();
}

public Future<V> poll() {
    return completionQueue.poll();
}

public Future<V> poll(long timeout, TimeUnit unit)
    throws InterruptedException {
    return completionQueue.poll(timeout, unit);
}
}

```

Untitled Sheets

HOM

- Executing tasks in Threads
- Executing sequentially
- Disadvantages of unbound thread creation
- Executor framework
- Execution policies
- Thread pools
- The Executors Factory
- The factory methods
- Exploitable parallelism
- The Callable Interface
- Completion service
- Delay and periodic tasks
- Task Execution Summary
- Completion Service Examples

HOM/FHTeal

Untitled Sheets

March 8, 2016

38/44

Time limits

Better then speed limits...
 Sometimes you cannot afford to wait forever.



- The difficulty is to wait just long enough, no longer.
- A timed version of Future.get provides that *I will wait to become a millionaire but no longer then 2 months.*
- A timed Future.get will throw an *I'm Bored* exception (actually: TimeoutException).
- By catching this exception you can cancel those tasks, so that they no longer take up resources. (as in: take them of the road.)

Untitled Sheets

HOM

- Executing tasks in Threads
- Executing sequentially
- Disadvantages of unbound thread creation
- Executor framework
- Execution policies
- Thread pools
- The Executors Factory
- The factory methods
- Exploitable parallelism
- The Callable Interface
- Completion service
- Delay and periodic tasks
- Task Execution Summary
- Completion Service Examples

HOM/FHTeal

Untitled Sheets

March 8, 2016

39/44

Timer is not that good.

The Timer class has its problems:

- A Timer creates one Thread to execute its tasks.
- Trigger misses during long tasks if period is short compared to task execution time.
- Timer behave poorly on Exceptions being thrown. An uncaught exception kills this Thread. This Thread is not recreated.
- See example on next sheet.

Untitled Sheets

HOM

- Executing tasks in Threads
- Executing sequentially
- Disadvantages of unbound thread creation
- Executor framework
- Execution policies
- Thread pools
- The Executors Factory
- The factory methods
- Exploitable parallelism
- The Callable Interface
- Completion service
- Delay and periodic tasks
- Task Execution Summary
- Completion Service Examples

HOM/FHTeal

Untitled Sheets

March 8, 2016

40/44

Out of Time

```

public class OutOfTime {
    public static void main(String[] args) throws Exception {
        Timer timer = new Timer();
        timer.schedule(new ThrowTask(), 1);
        SECONDS.sleep(1);
        timer.schedule(new ThrowTask(), 1);
        SECONDS.sleep(5);
    }

    static class ThrowTask extends TimerTask {
        public void run() {
            throw new RuntimeException();
        }
    }
}

```

HOM/FHTest

Untitled Sheets

March 8, 2016

Untitled Sheets

HOM

- Executing tasks in Threads
 - Executing sequentially
 - Disadvantages of unbound thread creation
- Executor framework
 - Execution policies
 - Thread pools
 - The Executors Factory
 - The factory methods
- Exploitable parallelism
 - The Callable interface
 - Completion service
 - Delay and periodic tasks
- Task Execution Summary
 - Completion Service
 - Examples

Summary

- Structuring applications with tasks can both simplify development and facilitate concurrency.
- The Executor framework permits decoupling of task submission and execution. with a range of execution policies
- Consider and executor if you do `new Thread(runnable).start()` a lot.
- Identify sensible task boundaries. Sometimes they come natural, sometimes you must do some analysis to find more homogeneous tasks to provide optimum parallelism.

HOM/FHTest

Untitled Sheets

March 8, 2016

Untitled Sheets

HOM

- Executing tasks in Threads
 - Executing sequentially
 - Disadvantages of unbound thread creation
- Executor framework
 - Execution policies
 - Thread pools
 - The Executors Factory
 - The factory methods
- Exploitable parallelism
 - The Callable interface
 - Completion service
 - Delay and periodic tasks
- Task Execution Summary
 - Completion Service
 - Examples

Completion service example 1

Your want ALL results, optimising concurrency

```

void solve(Executor e,
           Collection<Callable<Result>> solvers)
           throws InterruptedException, ExecutionException {
    CompletionService<Result> ecs
    = new ExecutorCompletionService<Result>(e);

    for (Callable<Result> s : solvers) {
        ecs.submit(s);
    }

    int n = solvers.size();

    for (int i = 0; i < n; ++i) {
        Result r = ecs.take().get();
        if (r != null)
            use(r);
    }
}

```

from api javadoc

HOM/FHTest

Untitled Sheets

March 8, 2016

Untitled Sheets

HOM

- Executing tasks in Threads
 - Executing sequentially
 - Disadvantages of unbound thread creation
- Executor framework
 - Execution policies
 - Thread pools
 - The Executors Factory
 - The factory methods
- Exploitable parallelism
 - The Callable interface
 - Completion service
 - Delay and periodic tasks
- Task Execution Summary
 - Completion Service
 - Examples

Completion service example 2

Your want ANY results, quickest wins

```

try {
    for (Callable<Result> s : solvers)
        futures.add(ecs.submit(s));
    for (int i = 0; i < n; ++i) {
        try {
            Result r = ecs.take().get();
            if (r != null) {
                result = r;
                break;
            }
        } catch (InterruptedException ignore) {}
    }
} finally {
    for (Future<Result> f : futures) {
        f.cancel(true);
    }
}

```

from api javadoc

HOM/FHTest

Untitled Sheets

March 8, 2016

Untitled Sheets

HOM

- Executing tasks in Threads
 - Executing sequentially
 - Disadvantages of unbound thread creation
- Executor framework
 - Execution policies
 - Thread pools
 - The Executors Factory
 - The factory methods
- Exploitable parallelism
 - The Callable interface
 - Completion service
 - Delay and periodic tasks
- Task Execution Summary
 - Completion Service
 - Examples
