

# Performance and Scalability

Pieter van den Hombergh

Fontys Hogeschool voor Techniek en Logistiek

April 16, 2018

## Thinking about performance

Do more with less

Cost and profit of concurrency

Performance versus scalability

Amdahls law

Queue examples

## Thread costs

Costs of context switching

Cost of memory synchronization

Blocking

## Reducing lock contention

Hurry up: Get in, get out

Reducing lock granularity

Lock striping

Avoiding hot fields

## Alternatives and measurement

Alternatives to exclusive locks

Monitoring CPU utilization

Say no to object pooling

Map performance

Reducing context switch overhead

## Summary

# Table of Contents

## Thinking about performance

- Do more with less
- Cost and profit of concurrency
- Performance versus scalability
- Amdahls law
- Queue examples

## Thread costs

- Costs of context switching
- Cost of memory synchronization
- Blocking

## Reducing lock contention

- Hurry up: Get in, get out
- Reducing lock granularity
- Lock striping
- Avoiding hot fields

## Alternatives and measurement

- Alternatives to exclusive locks
- Monitoring CPU utilization
- Say no to object pooling
- Map performance
- Reducing context switch overhead

## Summary

## Thinking about performance

- Do more with less
- Cost and profit of concurrency
- Performance versus scalability
- Amdahls law
- Queue examples

## Thread costs

- Costs of context switching
- Cost of memory synchronization
- Blocking

## Reducing lock contention

- Hurry up: Get in, get out
- Reducing lock granularity
- Lock striping
- Avoiding hot fields

## Alternatives and measurement

- Alternatives to exclusive locks
- Monitoring CPU utilization
- Say no to object pooling
- Map performance
- Reducing context switch overhead


## Summary

# Performance and scalability

**The** reason to use threads (and all its complexity) is improved performance

- Improve processor utilisation
- improve responsiveness

Here we explore techniques for analyzing, monitoring and improving the performance of concurrent programs

-  These techniques may increase complexity even more, with potentially more safety or liveness failures
- Worse even is that some “techniques” are counterproductive
- Safety should always come first: first make it **right**, then maybe make it **fast**.

#### Thinking about performance

Do more with less

Cost and profit of concurrency

Performance versus scalability

Amdahls law

Queue examples

#### Thread costs

Costs of context switching

Cost of memory synchronization

Blocking

#### Reducing lock contention

Hurry up: Get in, get out

Reducing lock granularity

Lock striping

Avoiding hot fields

#### Alternatives and measurement

Alternatives to exclusive locks

Monitoring CPU utilization

Say no to object pooling

Map performance

Reducing context switch overhead

#### Summary

# Do more with less

Improving performance means doing more work with less.

Dependent on the application this less can be found in

- CPU cycles
- memory
- network bandwidth
- database requests
- I/O bandwidth
- disk space
- or any number of other resources

When the activity is limited by the availability of a particular resource, we say it is *bound* by that resource: CPU-bound, bandwidth-bound, database-bound etc.

## Thinking about performance

### Do more with less

Cost and profit of concurrency

Performance versus scalability

Amdahls law

Queue examples

## Thread costs

Costs of context switching

Cost of memory synchronization

Blocking

## Reducing lock contention

Hurry up: Get in, get out

Reducing lock granularity

Lock striping

Avoiding hot fields

## Alternatives and measurement

Alternatives to exclusive locks

Monitoring CPU utilization

Say no to object pooling

Map performance

Reducing context switch overhead

## Summary

# Cost and profit of concurrency

Multiple threads introduce extra costs: coordinating (locking, signaling, memory synchronization), context switching, thread creation and teardown.

When threading is employed effectively the costs are made up by the greater throughput, responsiveness or capacity. ⚠️ A poorly designed concurrent application may perform worse than a comparable sequential one.

We want to achieve 2 things:

- 1 use processing power more effectively, with useful work
- 2 enable more use of the available resources once they become available again

## Thinking about performance

Do more with less

Cost and profit of concurrency

Performance versus scalability

Amdahls law

Queue examples

## Thread costs

Costs of context switching

Cost of memory synchronization

Blocking

## Reducing lock contention

Hurry up: Get in, get out

Reducing lock granularity

Lock striping

Avoiding hot fields

## Alternatives and measurement

Alternatives to exclusive locks

Monitoring CPU utilization

Say no to object pooling

Map performance

Reducing context switch overhead

## Summary

# How Fast versus How Much

Performance can be measured in a number of ways: **service time**, **latency**, **throughput**, **efficiency**, **scalability** or **capacity**

Some of these metrics say **how fast**, others **how much**

## Scalability

describes the ability to improve throughput or capacity by adding computing resources (CPU's, memory, storage, bandwidth)

Scalability depends on the *boundness* of the application.

Traditional performance optimization uses big-O notation and works towards *do the same work with less effort*. In scalability you want to get more work done when applying more resources.

### Thinking about performance

Do more with less

Cost and profit of concurrency

### Performance versus scalability

Amdahls law

Queue examples

### Thread costs

Costs of context switching

Cost of memory synchronization

Blocking

### Reducing lock contention

Hurry up: Get in, get out

Reducing lock granularity

Lock striping

Avoiding hot fields

### Alternatives and measurement

Alternatives to exclusive locks

Monitoring CPU utilization

Say no to object pooling

Map performance

Reducing context switch overhead

### Summary

## How Fast versus How Much cont'd

How much and how fast are not the same, in fact sometimes contradict each other. Often the total work is increased by subdividing the work into better scaling subtasks.

Many single threaded performance improvement tricks are bad for scalability (hot field example in 11.4.4).

The three-tier application model is a prime example here: an monolithical solution would outperform it on a small system, but then this monolith would not scale at all.

For server applications *how much* is of greater concern then *how fast*.

### Thinking about performance

Do more with less

Cost and profit of concurrency

### Performance versus scalability

Amdahls law

Queue examples

### Thread costs

Costs of context switching

Cost of memory synchronization

Blocking

### Reducing lock contention

Hurry up: Get in, get out

Reducing lock granularity

Lock striping

Avoiding hot fields

### Alternatives and measurement

Alternatives to exclusive locks

Monitoring CPU utilization

Say no to object pooling

Map performance

Reducing context switch overhead

### Summary

# Engineering is making tradeoffs

To be able to assess optimal performance, you need to know about the metrics of the application, like the typical size of the data set, but also what to optimize: average-case time, worst-case time or predictability.

## Avoid premature optimization

First make it right, then make it fast, *if* it is not already fast enough.

The cost in this case may not only be thread-safety hazards, but also things like code readability and thus maintainability.

### Thinking about performance

Do more with less

Cost and profit of concurrency

#### Performance versus scalability

Amdahls law

Queue examples

### Thread costs

Costs of context switching

Cost of memory synchronization

Blocking

### Reducing lock contention

Hurry up: Get in, get out

Reducing lock granularity

Lock striping

Avoiding hot fields

### Alternatives and measurement

Alternatives to exclusive locks

Monitoring CPU utilization

Say no to object pooling

Map performance

Reducing context switch overhead

### Summary



# Which is faster?

Before considering to make things faster, answer these questions:

- What do you mean by *faster*
- What are the conditions for this faster: heavy or light load, large or small data sets, is there any measurement on these speeds?
- What is the likeliness that such conditions will occur for your application?
- How likely is it that these conditions are not met?
- What are the hidden costs (in development and maintainance time and risks). Is that a good tradeoff?

## Thinking about performance

Do more with less

Cost and profit of concurrency

### Performance versus scalability

Amdahls law

Queue examples

## Thread costs

Costs of context switching

Cost of memory synchronization

Blocking

## Reducing lock contention

Hurry up: Get in, get out

Reducing lock granularity

Lock striping

Avoiding hot fields

## Alternatives and measurement

Alternatives to exclusive locks

Monitoring CPU utilization

Say no to object pooling

Map performance

Reducing context switch overhead

## Summary

# Measure before you tweek

The quest for performance is probably the single greatest source of concurrency bugs.

Start measuring the actual performance. Use profilers to track down your bottlenecks.

Never guess about your performance bottlenecks. Most likely you are wrong.

## Thinking about performance

Do more with less

Cost and profit of concurrency

### Performance versus scalability

Amdahls law

Queue examples

## Thread costs

Costs of context switching

Cost of memory synchronization

Blocking

## Reducing lock contention

Hurry up: Get in, get out

Reducing lock granularity

Lock striping

Avoiding hot fields

## Alternatives and measurement

Alternatives to exclusive locks

Monitoring CPU utilization

Say no to object pooling

Map performance

Reducing context switch overhead

## Summary

# Farmers wisdom

Any farmer will tell you that a lot of hands are a great help during harvest season, but of little use during growing season: Some things can be parallelized, and some can't.

Concurrent programs have a lot in common with farming: a mix of parallel and serial portions.

Amdahls law describes how much a program can theoretically be speed up: If  $F$  is the serial fraction and  $N$  is the number of CPU's then then upper boundary of the speedup is

$$\text{Speedup} \leq \frac{1}{F + \frac{(1-F)}{N}}$$

The utilization is determined by the serialization required by the application. Very often in task dispensing and result collection.

## Thinking about performance

Do more with less

Cost and profit of concurrency

Performance versus scalability

**Amdahls law**

Queue examples

## Thread costs

Costs of context switching

Cost of memory synchronization

Blocking

## Reducing lock contention

Hurry up: Get in, get out

Reducing lock granularity

Lock striping

Avoiding hot fields

## Alternatives and measurement

Alternatives to exclusive locks

Monitoring CPU utilization

Say no to object pooling

Map performance

Reducing context switch overhead

## Summary

# Little's law

There is another remarkable law called Little's law which tells us something about the average number of active tasks.

If the rate of task arrival is  $\lambda$  and the task execution time is expressed as  $W$  then the average tasks that are busy  $L$  and thus would have need for a thread is

$$L = \lambda \times W$$

following Little's law.

See [http://en.wikipedia.org/wiki/Little%27s\\_law](http://en.wikipedia.org/wiki/Little%27s_law)

## Thinking about performance

Do more with less

Cost and profit of concurrency

Performance versus scalability

**Amdahl's law**

Queue examples

## Thread costs

Costs of context switching

Cost of memory synchronization

Blocking

## Reducing lock contention

Hurry up: Get in, get out

Reducing lock granularity

Lock striping

Avoiding hot fields

## Alternatives and measurement

Alternatives to exclusive locks

Monitoring CPU utilization


Say no to object pooling

Map performance

Reducing context switch overhead

## Summary

# Amdahls graph

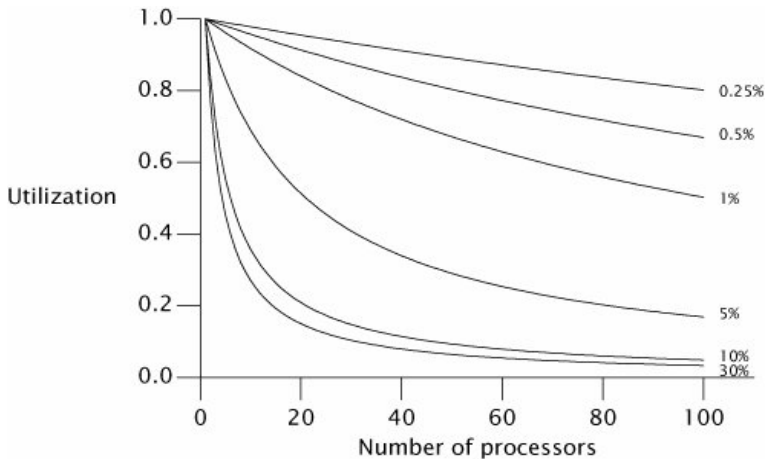

## Thinking about performance

Do more with less

Cost and profit of concurrency

Performance versus scalability

### Amdahls law

Queue examples

## Thread costs

Costs of context switching

Cost of memory synchronization

Blocking

## Reducing lock contention

Hurry up: Get in, get out

Reducing lock granularity

Lock striping

Avoiding hot fields

## Alternatives and measurement

Alternatives to exclusive locks

Monitoring CPU utilization

Say no to object pooling


Map performance

Reducing context switch overhead

## Summary

# Queue implementations

Two Queue implementations: Synchronized LinkedList versus ConcurrentLinkedList.

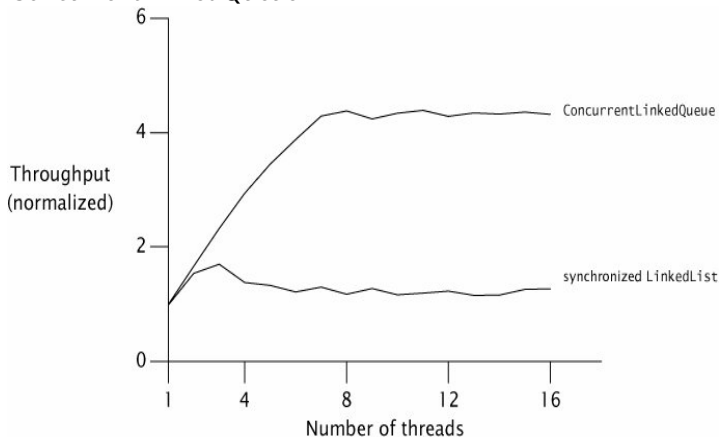

## Thinking about performance

Do more with less

Cost and profit of concurrency

Performance versus scalability

Amdahls law

### Queue examples

## Thread costs

Costs of context switching

Cost of memory synchronization

Blocking

## Reducing lock contention

Hurry up: Get in, get out

Reducing lock granularity

Lock striping

Avoiding hot fields

## Alternatives and measurement

Alternatives to exclusive locks

Monitoring CPU utilization

Say no to object pooling

Map performance

Reducing context switch overhead

## Summary

# Task queue as serialization source

```
public class WorkerThread extends Thread {
    private final BlockingQueue<Runnable> queue;

    public WorkerThread(BlockingQueue<Runnable> queue) {
        this.queue = queue;
    }

    public void run() {
        while (true) {
            try {
                Runnable task = queue.take();
                task.run();
            } catch (InterruptedException e) {
                break; /* Allow thread to exit */
            }
        }
    }
}
```

## Thinking about performance

Do more with less

Cost and profit of concurrency

Performance versus scalability

Amdahls law

Queue examples

## Thread costs

Costs of context switching

Cost of memory synchronization

Blocking

## Reducing lock contention

Hurry up: Get in, get out

Reducing lock granularity

Lock striping

Avoiding hot fields

## Alternatives and measurement

Alternatives to exclusive locks

Monitoring CPU utilization

Say no to object pooling

Map performance

Reducing context switch overhead

## Summary

# There is always serialization

All concurrent applications have some sources of serialization;  
if you think yours has not, think again.

## Thinking about performance

Do more with less

Cost and profit of concurrency

Performance versus scalability

Amdahls law

### Queue examples

## Thread costs

Costs of context switching

Cost of memory synchronization

Blocking

## Reducing lock contention

Hurry up: Get in, get out

Reducing lock granularity

Lock striping

Avoiding hot fields

## Alternatives and measurement

Alternatives to exclusive locks

Monitoring CPU utilization

Say no to object pooling

Map performance

Reducing context switch overhead

## Summary



# For concurrency to be useful, it must pay off

To get any benefit from your efforts, the benefits of parallelization must outweigh its costs.

## Thinking about performance

Do more with less

Cost and profit of concurrency

Performance versus scalability

Amdahls law

Queue examples

## Thread costs

Costs of context switching

Cost of memory synchronization

Blocking

## Reducing lock contention

Hurry up: Get in, get out

Reducing lock granularity

Lock striping

Avoiding hot fields

## Alternatives and measurement

Alternatives to exclusive locks

Monitoring CPU utilization

Say no to object pooling

Map performance

Reducing context switch overhead

## Summary

# The costs of context switching

If you only have one thread, it will almost never be scheduled out.

If there are more runnable threads than CPU's then the OS and VM will preempt threads so that others can use the processor.

Context switching involves manipulating *shared* OS and JVM data structures. More time spent switching context means less work is done.

Context switched almost invariably leads to cache misses.

A program that needs to do a lot of blocking (I/O waiting for locks or condition variables) will incur more context switching than a CPU bound program.

Much time spent in kernel mode often points to heavy scheduling activity, either by blocking for I/O or contended locks.

## Thinking about performance

Do more with less

Cost and profit of concurrency

Performance versus scalability

Amdahl's law

Queue examples

## Thread costs

Costs of context switching

Cost of memory synchronization

Blocking

## Reducing lock contention

Hurry up: Get in, get out

Reducing lock granularity

Lock striping

Avoiding hot fields

## Alternatives and measurement

Alternatives to exclusive locks

Monitoring CPU utilization

Say no to object pooling

Map performance

Reducing context switch overhead

## Summary

# Memory synchronization

The cost of `volatile` and `synchronized`.

It is important to make a distinction between **contended** (lock is owned by other thread) and **uncontended** (lock is free) synchronization. The synchronization mechanism is optimized for the uncontended case (`volatile` is always uncontended).

Uncontended synchronization is not free, but the trend is making it faster in modern JVM's.

A modern JVM can reduce the costs even more, by optimizing locking away if it knows a lock can never be contended.

## Thinking about performance

Do more with less

Cost and profit of concurrency

Performance versus scalability

Amdahls law

Queue examples

## Thread costs

Costs of context switching

Cost of memory synchronization

Blocking

## Reducing lock contention

Hurry up: Get in, get out

Reducing lock granularity

Lock striping

Avoiding hot fields

## Alternatives and measurement

Alternatives to exclusive locks

Monitoring CPU utilization

Say no to object pooling

Map performance

Reducing context switch overhead

## Summary

# Removal of certainly uncontended locks

```
public String getStoogeNames() {  
    List<String> stoogesL = new Vector<String>();  
    stoogesL.add("Moe");  
    stoogesL.add("Larry");  
    stoogesL.add("Curly");  
    return stoogesL.toString();  
}
```

In the above code the (synchronized) methods of Vector use the same lock, but since stooges is local, the whole thing is stack-confined and thus threadlocal: all synchronization can be dropped.

## Thinking about performance

Do more with less

Cost and profit of concurrency

Performance versus scalability

Amdahls law

Queue examples

## Thread costs

Costs of context switching

Cost of memory synchronization

Blocking

## Reducing lock contention

Hurry up: Get in, get out

Reducing lock granularity

Lock striping

Avoiding hot fields

## Alternatives and measurement

Alternatives to exclusive locks

Monitoring CPU utilization

Say no to object pooling

Map performance

Reducing context switch overhead

## Summary

# Current and future costs of uncontended locking

Do not worry too much about the costs of (mostly) uncontended synchronization. The basic mechanism is quite fast and JVM's can perform optimizations that further reduce or even eliminate the cost. Instead, concentrate on reducing areas where contention is most likely.

## Thinking about performance

Do more with less

Cost and profit of concurrency

Performance versus scalability

Amdahls law

Queue examples

## Thread costs

Costs of context switching

**Cost of memory synchronization**

Blocking

## Reducing lock contention

Hurry up: Get in, get out

Reducing lock granularity

Lock striping

Avoiding hot fields

## Alternatives and measurement

Alternatives to exclusive locks

Monitoring CPU utilization

Say no to object pooling

Map performance

Reducing context switch overhead

## Summary

# The cost of synchronization and blocking

Bypassing the cache for `volatile` and reads and writes from synchronized blocks also leads to contention on the shared memory bus. (Processors must wait for one another; Bus bandwidth is also a limiting factor).

Uncontended synchronization can be handled completely within the JVM.  
Contended synchronization may involve the OS which adds to its costs.

If the blocking is implemented by suspending the losing thread (instead of a spin-lock) the OS is involved, leading to two context switches: it is switched out before the end of its quantum and then switched back in again when the resource becomes available.

The winning thread also has a cost: it must tell the JVM/OS to resume the blocked threads.

## Thinking about performance

Do more with less

Cost and profit of concurrency

Performance versus scalability

Amdahls law

Queue examples

## Thread costs

Costs of context switching

Cost of memory synchronization

### Blocking

## Reducing lock contention

Hurry up: Get in, get out

Reducing lock granularity

Lock striping

Avoiding hot fields

## Alternatives and measurement

Alternatives to exclusive locks

Monitoring CPU utilization

Say no to object pooling

Map performance

Reducing context switch overhead

## Summary

# Threat to scalability

The principal threat to scalability in concurrent applications is the exclusive resource lock.

## Three ways to reduce lock contention

- 1 Reduce the duration in which the locks are held;
- 2 Reduce the frequency with which locks are requested;
- 3 Replace exclusive locks with coordinating mechanisms that allow greater concurrency.

### Thinking about performance

Do more with less

Cost and profit of concurrency

Performance versus scalability

Amdahls law

Queue examples

### Thread costs

Costs of context switching

Cost of memory synchronization

Blocking

### Reducing lock contention

Hurry up: Get in, get out

Reducing lock granularity

Lock striping

Avoiding hot fields

### Alternatives and measurement

Alternatives to exclusive locks

Monitoring CPU utilization

Say no to object pooling

Map performance

Reducing context switch overhead

### Summary

## Narrow the scope of a lock

In the code below, the reason for synchronized is access to the Map. The surrounding code is not *critical*. So it gets a 😞

```
@ThreadSafe
```

```
public class AttributeStore {  
    @GuardedBy("this") private final Map<String, String>  
        attributes = new HashMap<String, String>();  
  
    public synchronized boolean userLocationMatches(String name,  
                                                    String regexp,  
                                                    String key = "users." + name + ".location";  
                                                    String location = attributes.get(key);  
            if (location == null)  
                return false;  
            else  
                return Pattern.matches(regexp, location);  
    }  
}
```



# Better

```
@ThreadSafe
public class BetterAttributeStore {
    @GuardedBy("this") private final Map<String, String>
        attributes = new HashMap<String, String>();

    public boolean userLocationMatches(String name, String regexp) {
        String key = "users." + name + ".location";
        String location;
        synchronized (this) {
            location = attributes.get(key);
        }
        if (location == null)
            return false;
        else
            return Pattern.matches(regexp, location);
    }
}
```

Best would be: replace the HashMap with a synchronized map or even ConcurrentHashMap, delegating thread safety to those components.

## Thinking about performance

Do more with less

Cost and profit of concurrency

Performance versus scalability

Amdahls law

Real world examples

## Thread costs

Costs of context switching

Cost of memory synchronization

Blocking

## Reducing lock contention

Hurry up: Get in, get out

Reducing lock granularity

Lock striping

Avoiding hot fields

## Alternatives and measurement

Alternatives to exclusive locks

Monitoring CPU utilization

Say no to object pooling

Map performance

Reducing context switch overhead

## Summary

# Shrinking until you fall in

Take care that when shrinking the synchronized blocks, operations that must occur atomically still do so. Do not make the blocks too small to maintain invariants that are involved.

The example is where multiple variables participate in an invariant. Any invariant affecting code must be atomically with respect to that invariant.

## Thinking about performance

Do more with less

Cost and profit of concurrency

Performance versus scalability

Amdahl's law

Queue examples

## Thread costs

Costs of context switching

Cost of memory synchronization

Blocking

## Reducing lock contention

Hurry up: Get in, get out

**Reducing lock granularity**

Lock striping

Avoiding hot fields

## Alternatives and measurement

Alternatives to exclusive locks

Monitoring CPU utilization

Say no to object pooling

Map performance

Reducing context switch overhead

## Summary

# Reducing lock granularity

If a lock is heavily contended, but the synchronized blocks access independent state variables (those that *do not* participate in an invariant, then the locks may be split or striped.

As an example think of one lock for the whole application: everything would contend for that single lock. This lock would be heavily contended.

If you isolate independent parts, those parts may use independent locks, reducing the likeliness that threads contend over the same locks.

## Thinking about performance

Do more with less

Cost and profit of concurrency

Performance versus scalability

Amdahls law

Queue examples

## Thread costs

Costs of context switching

Cost of memory synchronization

Blocking

## Reducing lock contention

Hurry up: Get in, get out

**Reducing lock granularity**

Lock striping

Avoiding hot fields

## Alternatives and measurement

Alternatives to exclusive locks

Monitoring CPU utilization

Say no to object pooling

Map performance

Reducing context switch overhead

## Summary

# Lock splitting candidate

```
@ThreadSafe
public class ServerStatusBeforeSplit {
    @GuardedBy("this") public final Set<String> users;
    @GuardedBy("this") public final Set<String> queries;

    public synchronized void addUser(String u) {
        users.add(u);
    }

    public synchronized void addQuery(String q) {
        queries.add(q);
    }

    public synchronized void removeUser(String u) {
        users.remove(u);
    }

    public synchronized void removeQuery(String q) {
        queries.remove(q);
    }
}
```

## Thinking about performance

Do more with less

Cost and profit of concurrency

Performance versus scalability

Amdahls law

Queue examples

## Thread costs

Costs of context switching

Cost of memory synchronization

Blocking

## Reducing lock contention

Hurry up: Get in, get out

**Reducing lock granularity**

Lock striping

Avoiding hot fields

## Alternatives and measurement

Alternatives to exclusive locks

Monitoring CPU utilization

Say no to object pooling

Map performance

Reducing context switch overhead

## Summary

# Lock striping

One step further than splitting a lock in two, is splitting it up into a larger set, with the intention that these extra locks are less contended. This is called **striping**.

The example `StripedMap` is similar in design as the `ConcurrentHashMap`, so you get the idea.

## Thinking about performance

Do more with less

Cost and profit of concurrency

Performance versus scalability

Amdahl's law

Queue examples

## Thread costs

Costs of context switching

Cost of memory synchronization

Blocking

## Reducing lock contention

Hurry up: Get in, get out

Reducing lock granularity

**Lock striping**

Avoiding hot fields

## Alternatives and measurement

Alternatives to exclusive locks

Monitoring CPU utilization

Say no to object pooling

Map performance

Reducing context switch overhead

## Summary

# Constructor of ConcurrentHashMap

Example: ctor in ConcurrentHashMap.

```
public ConcurrentHashMap(int initialCapacity,
                        float loadFactor, int concurrencyLevel)
    if (!(loadFactor > 0.0f) || initialCapacity < 0 || concurrencyLevel < 1)
        throw new IllegalArgumentException();
    if (initialCapacity < concurrencyLevel) // Use at least as
        initialCapacity = concurrencyLevel; // as estimated the
    long size = (long)(1.0 + (long)initialCapacity / loadFactor);
    int cap = (size >= (long)MAXIMUM_CAPACITY) ?
        MAXIMUM_CAPACITY : tableSizeFor((int)size);
    this.sizeCtl = cap;
}
```

# Avoid hot fields



## Performance and Scalability

### HOM

#### Thinking about performance

- Do more with less
- Cost and profit of concurrency
- Performance versus scalability
- Amdahls law
- Queue examples

#### Thread costs

- Costs of context switching
- Cost of memory synchronization
- Blocking

#### Reducing lock contention

- Hurry up: Get in, get out
- Reducing lock granularity
- Lock striping

#### Avoiding hot fields

#### Alternatives and measurement

- Alternatives to exclusive locks
- Monitoring CPU utilization
- Say no to object pooling
- Map performance
- Reducing context switch overhead

#### Summary

# Hot fields are areas that are heavily contended

Commonly, caching is one way to achieve optimisation.

These caches themselves could become hot field liabilities if not used properly.

Keeping a count to have a quick answer for `size()` and `isEmpty()` works well in the single threaded case, but could become a contended data area in a concurrent setting.

## Thinking about performance

Do more with less

Cost and profit of concurrency

Performance versus scalability

Amdahls law

Queue examples

## Thread costs

Costs of context switching

Cost of memory synchronization

Blocking

## Reducing lock contention

Hurry up: Get in, get out

Reducing lock granularity

Lock striping

**Avoiding hot fields**

## Alternatives and measurement

Alternatives to exclusive locks

Monitoring CPU utilization

Say no to object pooling

Map performance

Reducing context switch overhead

## Summary



# Reduce lock exclusivity

Another way to prevent the effects of lock contention is to abstain from using exclusive locks and instead use more concurrent friendly ways of managing state.

Examples are using

- concurrent collection,
- read-write locks,
- immutable objects and
- atomic variables.

ReadWriteLock provides a multiple-reader, single-writer lock. For mostly-read data structure ReadWriteLock can offer greater concurrency than exclusive locking; for read-only access, using immutability (perhaps with a wrapper) can eliminate the need for a lock completely.

## Thinking about performance

Do more with less

Cost and profit of concurrency

Performance versus scalability

Amdahl's law

Queue examples

## Thread costs

Costs of context switching

Cost of memory synchronization

Blocking

## Reducing lock contention

Hurry up: Get in, get out

Reducing lock granularity

Lock striping

Avoiding hot fields

## Alternatives and measurement

Alternatives to exclusive locks

Monitoring CPU utilization

Say no to object pooling

Map performance

Reducing context switch overhead

## Summary

# Use atomic variables

Atomic variables can help reducing costs of updating hot fields such as statistics counters, sequence generators or the reference to the first node in a linked data structure.

Atomic variable classes exhibit fine-grained atomic operations on integers or object references and are implemented blocking free, using such instructions as **compare-and-swap**

Note that reducing the number of hot fields helps more, because atomic updates do not completely reduce the cost of updates.

## Thinking about performance

Do more with less

Cost and profit of concurrency

Performance versus scalability

Amdahls law

Queue examples

## Thread costs

Costs of context switching

Cost of memory synchronization

Blocking

## Reducing lock contention

Hurry up: Get in, get out

Reducing lock granularity

Lock striping

Avoiding hot fields

## Alternatives and measurement

Alternatives to exclusive locks

Monitoring CPU utilization

Say no to object pooling

Map performance

Reducing context switch overhead

## Summary

# Monitoring CPU Utilization

In general, to improve throughput, keeping the CPU fully utilized is the main optimization goal.

If the hot-ness of the CPU's is unbalanced, you need to find possibilities to increase parallelism. Such asymmetry indicates that computation is taking place in a small set of threads. Your application will not fully utilize additional processors.

## Thinking about performance

Do more with less

Cost and profit of concurrency

Performance versus scalability

Amdahl's law

Queue examples

## Thread costs

Costs of context switching

Cost of memory synchronization

Blocking

## Reducing lock contention

Hurry up: Get in, get out

Reducing lock granularity

Lock striping

Avoiding hot fields

## Alternatives and measurement

Alternatives to exclusive locks

### Monitoring CPU utilization

Say no to object pooling

Map performance

Reducing context switch overhead

## Summary

# Underutilization causes

**Insufficient Load** The application may not receive sufficient load. The clients might running at full capacity.

**I/O-Bound** One can be monitor if the application is disk or network bound with appropriate monitoring tools.

**Externally bound** The bottleneck may be in the database or web service, not in your own code. Use profiling or database administration tools to determine the time spent in waiting for answers .

**Lock contention** Profilers can tell how much lock contention you experience and which locks are hot. By randomly triggering thread dumps, these can help find contended locks. Waiting threads will show “waiting for lock on monitor ...”. Mostly uncontended locks will hardly show up. Heavily contended locks most likely will.

## Thinking about performance

Do more with less

Cost and profit of concurrency

Performance versus scalability

Amdahls law

Queue examples

## Thread costs

Costs of context switching

Cost of memory synchronization

Blocking

## Reducing lock contention

Hurry up: Get in, get out

Reducing lock granularity

Lock striping

Avoiding hot fields

## Alternatives and measurement

Alternatives to exclusive locks

### Monitoring CPU utilization

Say no to object pooling

Map performance

Reducing context switch overhead

## Summary

# Room for improvement?

If your CPU's are sufficiently hot, you may want to find out if adding CPU's will help: is the application scalable.

Reconfiguring the system may be in order such as changing the number of threads in the pool.

If CPU utilization is high and there is always a number of threads waiting for the CPU, your application might benefit from throwing more CPU's at it.

## Thinking about performance

Do more with less

Cost and profit of concurrency

Performance versus scalability

Amdahls law

Queue examples

## Thread costs

Costs of context switching

Cost of memory synchronization

Blocking

## Reducing lock contention

Hurry up: Get in, get out

Reducing lock granularity

Lock striping

Avoiding hot fields

## Alternatives and measurement

Alternatives to exclusive locks

### Monitoring CPU utilization

Say no to object pooling

Map performance

Reducing context switch overhead

## Summary

# Do not pool objects

Pooling objects<sup>1</sup> was popular in times when memory management (allocation and garbage collection) was less mature.

Nowadays allocation is faster than `malloc` in C. The common code path for `new Object()` is about 10 machine instructions.

Pooling (reusing) object in concurrent application only makes things worse:

- A pool is a shared data structure; `new Object()`s are not shared;
- Potential problem of improper state of the reused object.
- Blocking is 100 times more costly than `new`'s allocation.

---

<sup>1</sup>This slide is about *Object pooling*, not **Thread Pooling**. Don't mix things up.

## Thinking about performance

Do more with less

Cost and profit of concurrency

Performance versus scalability

Amdahl's law

Queue examples

## Thread costs

Costs of context switching

Cost of memory synchronization

Blocking

## Reducing lock contention

Hurry up: Get in, get out

Reducing lock granularity

Lock striping

Avoiding hot fields

## Alternatives and measurement

Alternatives to exclusive locks

Monitoring CPU utilization

**Say no to object pooling**

Map performance

Reducing context switch overhead

## Summary

Allocating objects is usually cheaper than synchronization.

#### Thinking about performance

Do more with less

Cost and profit of concurrency

Performance versus scalability

Amdahl's law

Queue examples

#### Thread costs

Costs of context switching

Cost of memory synchronization

Blocking

#### Reducing lock contention

Hurry up: Get in, get out

Reducing lock granularity

Lock striping

Avoiding hot fields

#### Alternatives and measurement

Alternatives to exclusive locks

Monitoring CPU utilization

**Say no to object pooling**


Map performance

Reducing context switch overhead

#### Summary

# Comparing map performance

Traditional maps share one lock for the entire map. In the figure two synchronized maps and two Concurrent maps are compared.

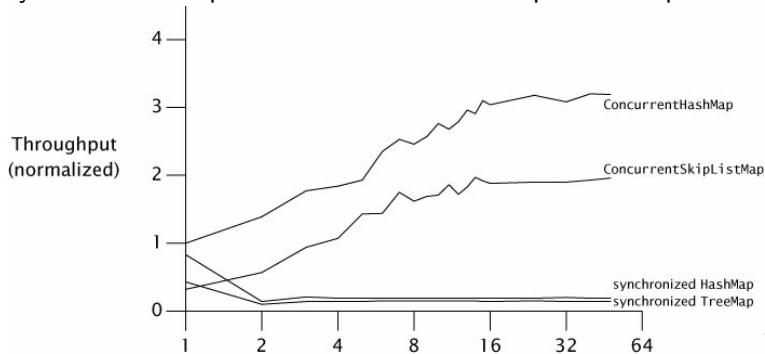

The behaviour of the synchronized versions is typical for applications whose scalability is limited by lock contention.

## Thinking about performance

- Do more with less
- Cost and profit of concurrency
- Performance versus scalability
- Amdahls law
- Queue examples

## Thread costs

- Costs of context switching
- Cost of memory synchronization
- Blocking

## Reducing lock contention

- Hurry up: Get in, get out
- Reducing lock granularity
- Lock striping
- Avoiding hot fields

## Alternatives and measurement

- Alternatives to exclusive locks
- Monitoring CPU utilization
- Say no to object pooling
- Map performance**
- Reducing context switch overhead

## Summary



# If something makes tired, do it less often

Prevent contention or make contention less likely by holding less locks or holding them for shorter times. This also reduces the number of context switches  
In the logging example: contention on the queue is less likely than blocking for I/O, which mostly involves the OS anyway.



By moving the I/O to one thread we not only eliminate the change of contention for the output stream.

Having *all* running to the water pool and *all* putting water on the fire will produce contention at both ends.

## Thinking about performance

Do more with less

Cost and profit of concurrency

Performance versus scalability

Amdahl's law

Queue examples

## Thread costs

Costs of context switching

Cost of memory synchronization

Blocking

## Reducing lock contention

Hurry up: Get in, get out

Reducing lock granularity

Lock striping

Avoiding hot fields

## Alternatives and measurement

Alternatives to exclusive locks

Monitoring CPU utilization

Say no to object pooling

Map performance

Reducing context switch overhead

## Summary

# Summary

- Multiprocessors is nowadays the most common reason to use threads,
- this implies that we are concerned with throughput or scalability,
- raw service time comes second to that
- Amdahls law states that scalability is determined by the proportion of code that shares data, i.e. that must be executed serially
- Serialisation is determined largely by the use of resource locks,
- scalability will improve by reducing the lock holding time:
  - reduce the time holding the lock
  - reduce lock granularity
  - replace exclusive locks by non-exclusive locks or non blocking alternatives

## Thinking about performance

Do more with less

Cost and profit of concurrency

Performance versus scalability

Amdahls law

Queue examples

## Thread costs

Costs of context switching

Cost of memory synchronization

Blocking

## Reducing lock contention

Hurry up: Get in, get out

Reducing lock granularity

Lock striping

Avoiding hot fields

## Alternatives and measurement

Alternatives to exclusive locks

Monitoring CPU utilization

Say no to object pooling

Map performance

Reducing context switch overhead

## Summary